


机壳与胶圈干涉建议单边0.15最小, 胶圈尺寸跑上限.

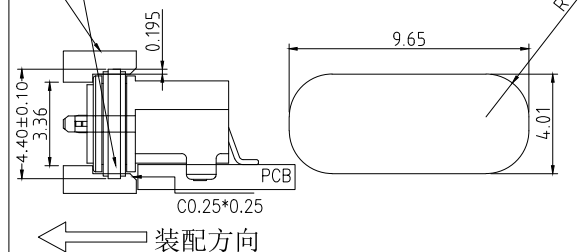



组装示意图

开孔尺寸参考

组装外壳时需要打环保润滑油

胶圈使用尺寸参考图

plug插入深度参考图

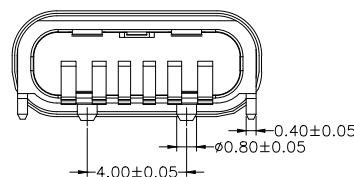

Note:

1.Material:

1.1 Housing: LCP

1.2 Contact:C7025,t=0.20mm

1.3 Shell: SUS316

2.ELECTRICAL:

2-1:CURRENT RATING:

VBUS AND GND CONTACTS RATED AT 1.25A
PARALLELED FOR A TOTAL OF 5A;

2-2:INITIAL CONTACT RESISTANCE :40 MEGOHMS

2-3:DIELECTRIC WITHSTANDING VOLTAGE:

100V AC MIN;


3:MECHANICAL CHARACTERISTICS:

3-1:MATING FORCE:5~20N

3-2:UNMATING FORCE:8~20N(INITIAL),
6~20N(AFTER 10000 CYCLES)

3-3:FREQUENCY: 200±50 CYCLES /HOUR,
10000 CYCLES

3-4:OPERATING TEMPERATURE : -40°~80°.

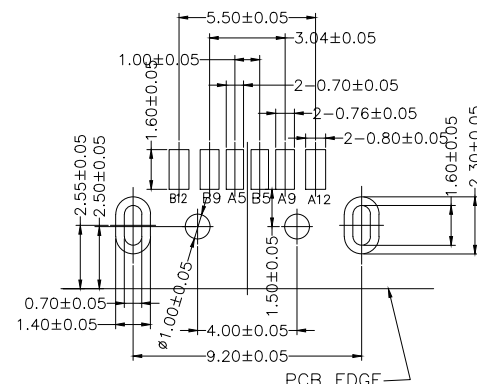

PCB LAYOUT 图仅供参考




TABLE B

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

MEASURE POINT:

QUADRANT POINT

TANGENCY POINT

INTERSECTION POINT

QP

TP

IP

UNLESS OTHERWISE
SPECIFIED, TOLERANCE:

X. ±0.25

X.x ±0.20

X.xx ±0.15

X.xxx ±0.10

ANGLES ±2°



深圳金盟实业有限公司

ShenzhenJinmengIndustrialCo.,Ltd

TITLE:USB C TYPE CONNECTOR

TYPE-C 6PIN板上型防水母座 后两脚 粉末冶金

工程图

THIRD ANGLE PROJECTION



UNIT:

mm

DRAW NO:01.01.00014

TEL:0755-89973631

SCALE:


1:1

SIZE:


A4

SHEET:


1/2

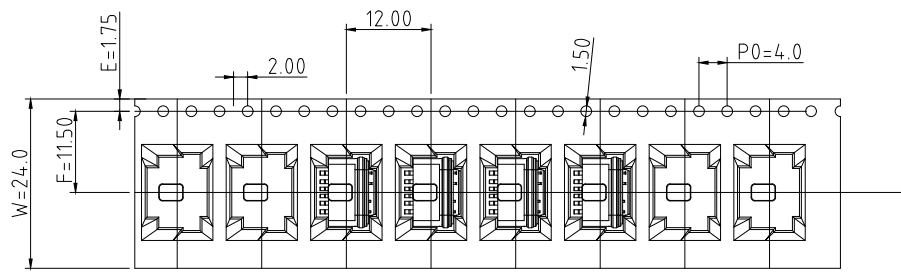


① 产品入载带示意图




② 卷盘贴标签示意图

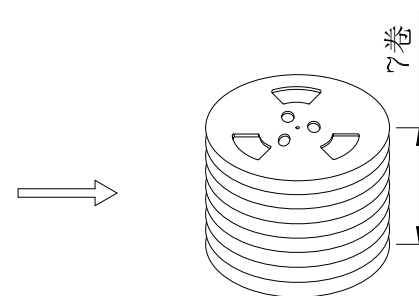

③ 7盘产品叠层示意图

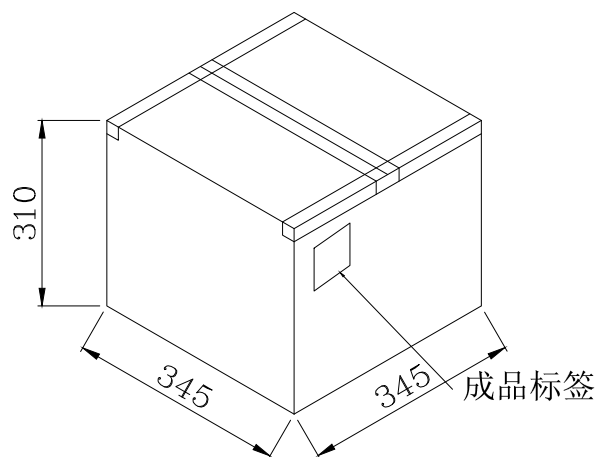

⑤ 外箱封箱示意图

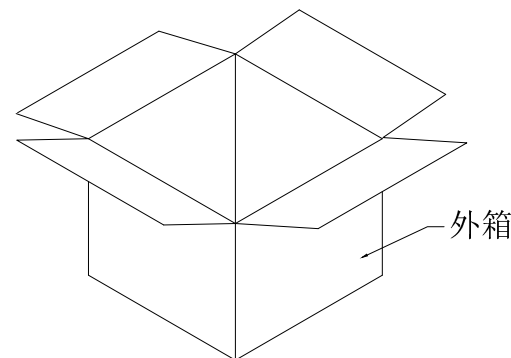

④ 产品入外箱示意图

	REEL	CARTON
CONNECTOR (PCS)	1000	7000

包装说明:

1. 将检验好的成品;对插口朝前放入载带;每卷装1000PCS产品;具体如图一所示
2. 将包装好的产品;每盘必需贴上内标签;具体如图二所示
3. 将贴好内标签的产品每7盘叠;具体如图三所示
5. 装好后并封好纸箱及贴好相关标签;具体如图五所示;
(产品包装的标签,如客户有要求,请按客户要求包装出货)
6. 载带前面留13PCS空格,后面留13PCS空格
7. COVER与CARRY剥离力:50-125g,速度:300mm/分钟左右,剥离角度:165°-180°

MEASURE POINT:
QUADRANT POINT QP
TANGENCY POINT TP
INTERSECTION POINT IP

UNLESS OTHERWISE
SPECIFIED, TOLERANCE:

X. ±0.25
X. x ±0.20
X. xx ±0.15
X. xxx ±0.10
ANGLES ±2°



深圳金盟实业有限公司


ShenzhenJinmengIndustrialCo.,Ltd

TITLE:USB C TYPE CONNECTOR

TYPE-C 6PIN板上型防水母座 后两脚 粉末冶金

工程图

THIRD ANGLE PROJECTION



UNIT:

mm

SCALE:

1:1

SIZE:

A4

SHEET:

1/2

DRAW NO:01.01.00014

TEL:0755-89973631