

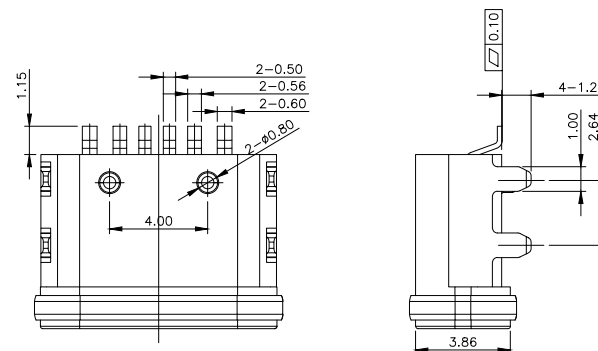







建议防水圈

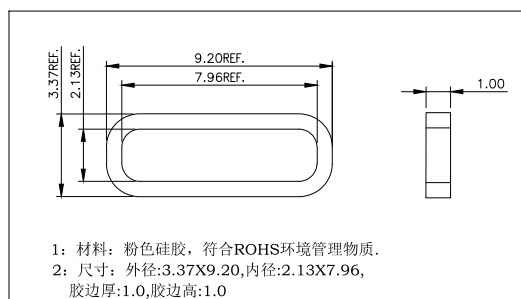

- 1: 材料: 粉色硅胶, 符合ROHS环境管理物质.
2: 尺寸: 外径:3.37X9.20, 内径:2.13X7.96,
胶边厚:1.0, 胶边高:1.0

USB TYPE-C PIN ASSIGNMENTS:

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

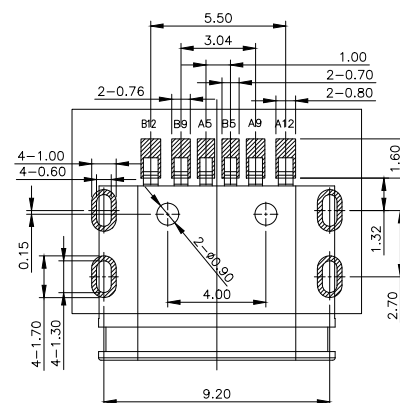


RECOMMENDED P.C.B. LAYOUT

TOLERANCE UNSPECIFIED ±0.05mm

NOTES:

1. CURRENT RATING: 5A MAX.
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -40 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX.
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES
9. Water Resistance: IPX7



MEASURE POINT:
QUADRANT POINT
TANGENCY POINT
INTERSECTION POINT



深圳金盟实业有限公司
ShenzhenJinmengIndustrialCo., Ltd

UNLESS OTHERWISE
SPECIFIED, TOLERANCE:
X. ±0.25
X.x ±0.20
X.xx ±0.15
X.xxx ±0.10
ANGLES ±2°

TITLE:USB C TYPE CONNECTOR

TYPE-C 6PIN板上四脚插板防水母座粉末研金壳
IPX7级双圈

工程图

THIRD ANGLE PROJECTION



UNIT:

mm

SCALE:

1:1

SIZE:

A4

SHEET:

1/2