

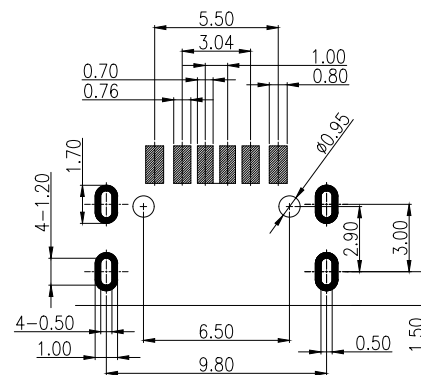


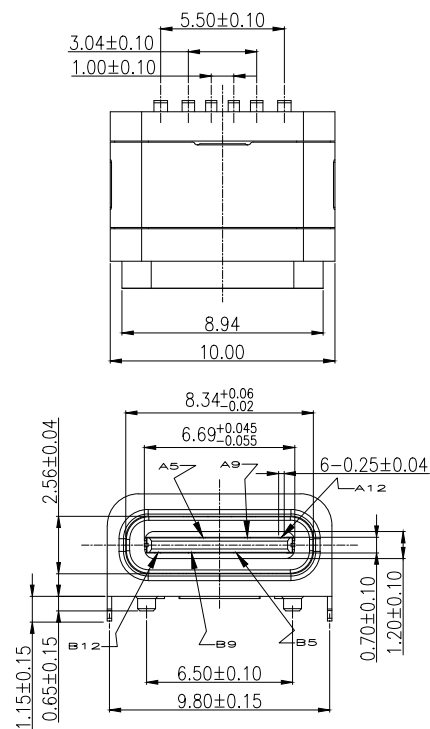



Recommended P.C.B. Layout
Unspecified tolerance: ± 0.05
(Top view)

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

SUS304R-1/2H. T=0.20mm	Ni:50u"Min;
SUS304R-1/2H. T=0.30mm	Ni:50u"Min;
PA9T (G. F30%) . BLACK.	/
C2680R-H. T=0.20mm	Ni:30u"Min; Au:CONTACT AREA:1u", Solder AREA:G/F
LCP (G. F30%) BLACK.	/
MATERIALS	FINISH




此面点防水胶

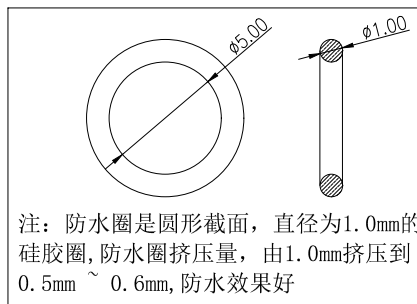

NOTES:

1. CURRENT RATING:
3.0A MAX.
2. DIELECTRIC WITHSTAND VOLTAGE:
100VAC.
3. TEMPERATURE RANGE:
 $-30^{\circ}\text{C} \sim 85^{\circ}\text{C}$.
4. CONTACT RESISTANCE:
40 MILLIONHM MAX.
5. INSULATION RESISTANCE:
100 MEGOHMS MIN.
6. INSERTION FORCE :
5N~20N.
7. UNMATING FORCE:
8N~20N.
8. DURABILITY:
10,000 CYCLES.
9. WATERPROOF RATING: IPX7.
10. ALL PRODUCTS COMPLY WITH RoHS
ENVIRONMENTAL REQUIREMENTS.



MEASURE POINT:
QUADRANT POINT QP
TANGENCY POINT TP
INTERSECTION POINT IP

UNLESS OTHERWISE
SPECIFIED, TOLERANCE:
X. ± 0.25
X. x ± 0.20
X. xx ± 0.15
X. xxx ± 0.10
ANGLES $\pm 2^{\circ}$




深圳金盟实业有限公司
ShenzhenJinmengIndustrialCo., Ltd

TITLE:USB C TYPE CONNECTOR

TYPE C 6Pin SMT 防水
L=7.85 四脚插板(点胶款)

工程图

THIRD ANGLE PROJECTION



UNIT:

mm

DRAW NO:01.01.00013

TEL:0755-89973631

SCALE:

1:1

SIZE:

A4

SHEET:

1/2