



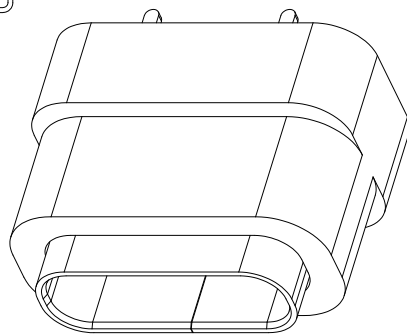






NOTES:

1. CURRENT RATING:
5.0A MAX.
2. DIELECTRIC WITHSTAND VOLTAGE:
100VAC.
3. TEMPERATURE RANGE:
-30 °C ~ 85 °C.
4. CONTACT RESISTANCE:
40 MILLIONHM MAX.
5. INSULATION RESISTANCE:
100 MEGOHMS MIN.
6. INSERTION FORCE :
5N~20N.
7. UNMATING FORCE:
8N~20N.
8. DURABILITY:
10,000 CYCLES.
9. WATERPROOF RATING: IPX7.
10. ALL PRODUCTS COMPLY WITH RoHS
ENVIRONMENTAL REQUIREMENTS.


IPX7





1.2m/30min

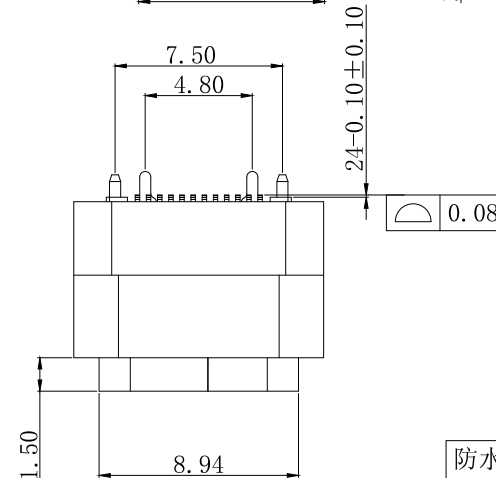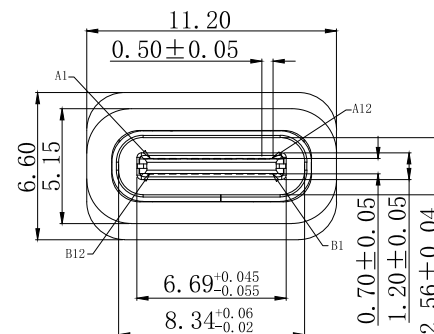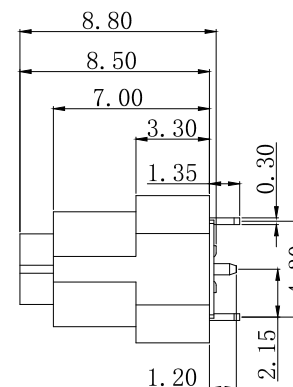SECTION
SCALE 1:1

防水圈:

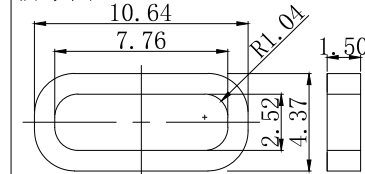

- 1: 材料: 黑色硅胶, 符合RoHS环境管理物质.
- 2: 尺寸: 外径:10.64*4, 86*1.50mm.
- 3: 防水圈建议下压至0.90mm.

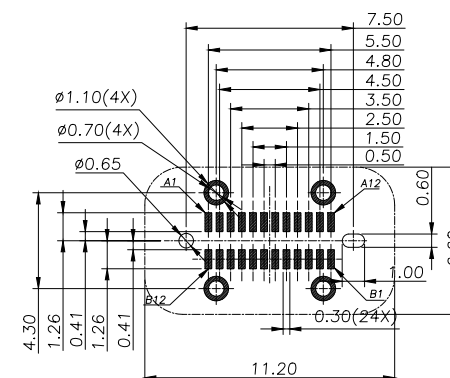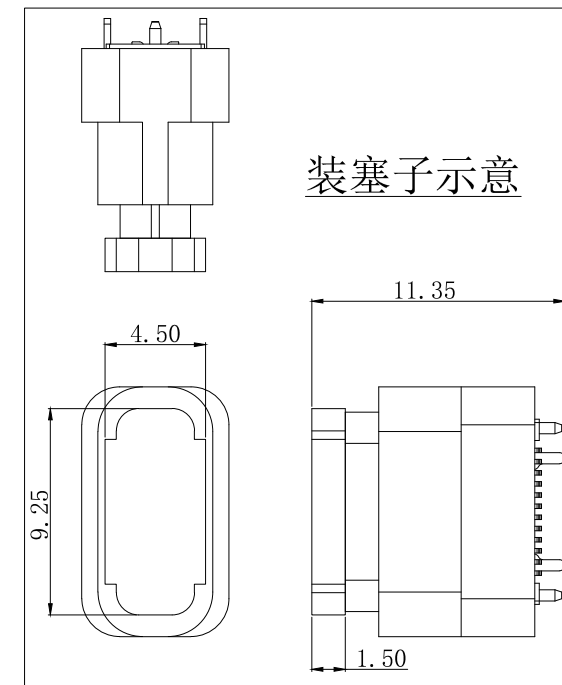

RECOMMENDED PCB LAYOUT (TOP VIEW)


THICKNESS 1.0±0.10MM; DEFAULT TOLERANCE: ±0.05

黑色, ROHS.

MATERIALS	FINISH
SUS304R-1/2H, T=0.30mm	Ni:50u"Min;
PA9T(G.F30%) BLACK.	/
SUS304 R-H, T=0.15mm	/
C7025.TM03, T=0.15mm	Ni:30u"Min; Au:CONTACT AREA:1u", Solder AREA: G/F.
C7025.TM03, T=0.15mm	
LCP(G.F30%) BLACK.	/
MATERIALS	FINISH

MEASURE POINT:
QUADRANT POINT QP
TANGENCY POINT TP
INTERSECTION POINT IPUNLESS OTHERWISE
SPECIFIED, TOLERANCE:X. ±0.25
X. x ±0.20
X. xx ±0.15
X. xxx ±0.10
ANGLES ±2°深圳金盟实业有限公司
Shenzhen Jinmeng Industrial Co., LtdTITLE: USB C TYPE CONNECTOR
TYPE C 24Pin 立贴 防水
H=8.80 四脚插板(点胶款)

THIRD ANGLE PROJECTION



UNIT:

mm

DRAW NO: 01.01.00050

TEL: 0755-89973631

SCALE:

1:1

SIZE:

A4

SHEET:

1/2