



RoHS Compliant

CUSTOMER DRAWING

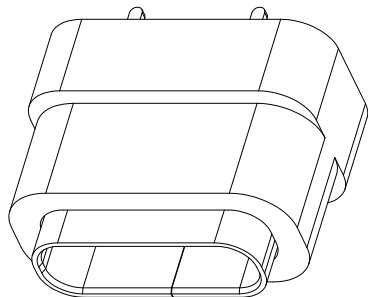



IPX7



1.2m/30min




NOTES:

1. CURRENT RATING:
5.0A MAX.
2. DIELECTRIC WITHSTAND VOLTAGE:
100VAC.
3. TEMPERATURE RANGE:
-30 °C ~ 85 °C.
4. CONTACT RESISTANCE:
40 MILLIONHM MAX.
5. INSULATION RESISTANCE:
100 MEGOHMS MIN.
6. INSERTION FORCE :
5N~20N.
7. UNMATING FORCE:
8N~20N.
8. DURABILITY:
10,000 CYCLES.
9. WATERPROOF RATING: IPX7.
10. ALL PRODUCTS COMPLY WITH RoHS
ENVIRONMENTAL REQUIREMENTS.

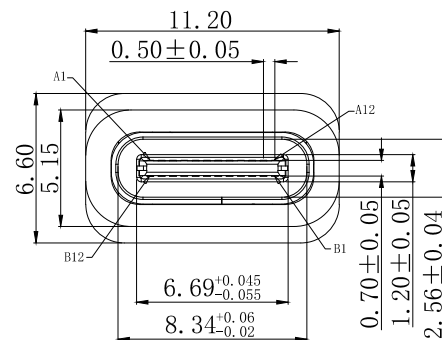


SECTION


SCALE 1:1

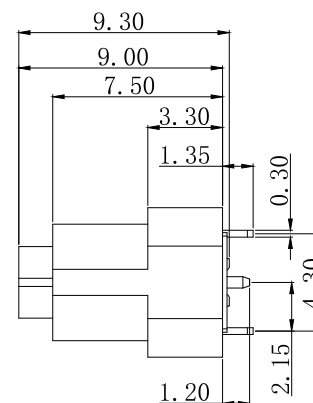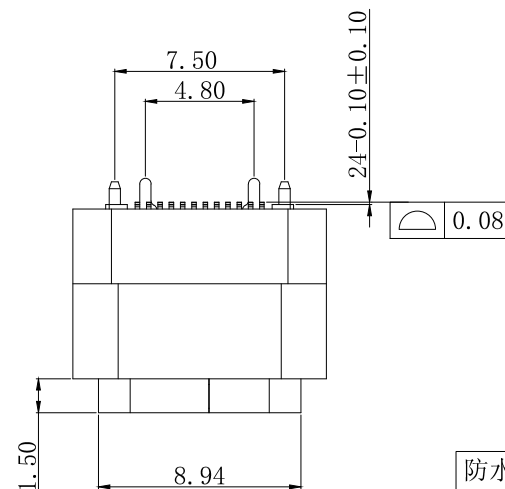


防水圈:

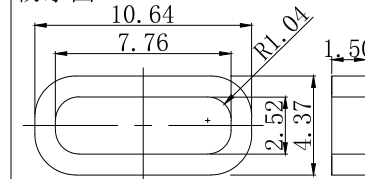

- 1: 材料: 黑色硅胶, 符合RoHS环境管理物质.
- 2: 尺寸: 外径:10.64*4.86*1.50mm.
- 3: 防水圈建议下压至0.90mm.

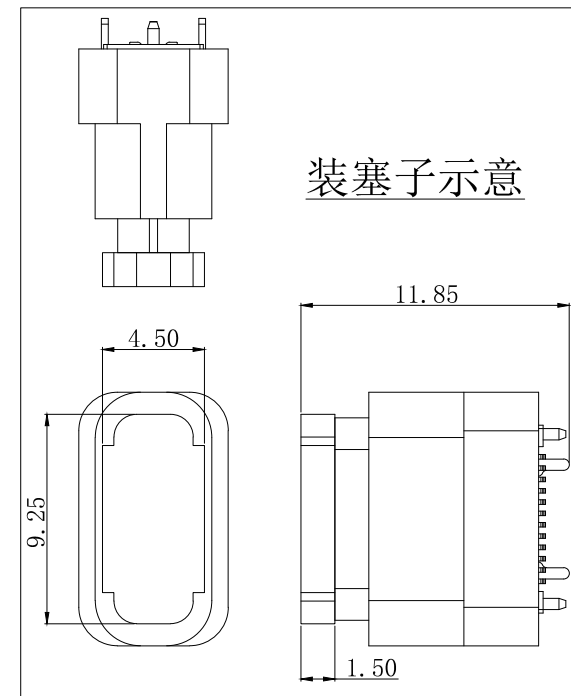

装塞子示意

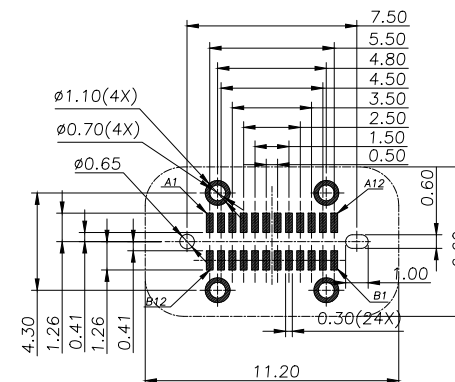

RECOMMENDED PCB LAYOUT(TOP VIEW)

THICKNESS 1.0±0.10MM;DEFAULT TOLERANCE: ±0.05

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND	SSTXp1	SSTXn1	VBUS	CC1	D+	D-	SUB1	VBUS	SSRXn2	SSRXp2	GND
GND	SSRXp1	SSRXn1	VBUS	SUB2	D-	D+	CC1	VBUS	SSTXn2	SSTXp2	GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1

黑色, RoHS.	
SUS304R-1/2H,T=0.30mm	Ni:50u"Min;
PA9T(G.F30%)BLACK.	/
SUS304 R-H,T=0.15mm	/
C7025.TM03. T=0.15mm	Ni:30u"Min;
C7025.TM03. T=0.15mm	Au:CONTACT AREA:1u", Solder AREA: G/F.
LCP(G.F30%) BLACK.	/
MATERIALS	FINISH

MEASURE POINT:
QUADRANT POINT
TANGENCY POINT
INTERSECTION POINT

QP
TP
IP

UNLESS OTHERWISE
SPECIFIED, TOLERANCE:

X. ±0.25
X.x ±0.20
X.xx ±0.15
X.xxx ±0.10
ANGLES ±2°



TITLE:USB C TYPE CONNECTOR
TYPE C 24Pin 立贴 防水
H=9.30 四脚插板(点胶款)

THIRD ANGLE PROJECTION



深圳金盟实业有限公司
ShenzhenJinmengIndustrialCo.,Ltd

DRAW NO:01.01.00051

TEL:0755-89973631

UNIT: mm
SCALE: 1:1
SIZE: A4
SHEET: 1/2