
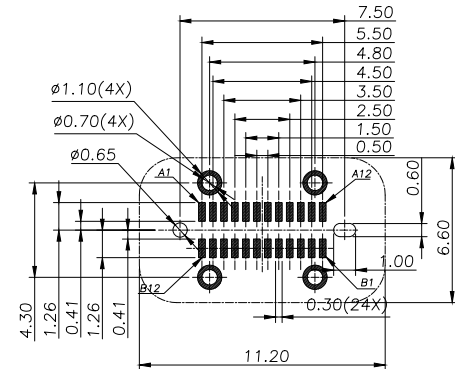
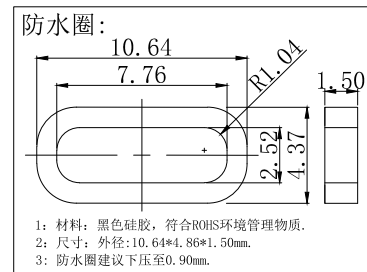
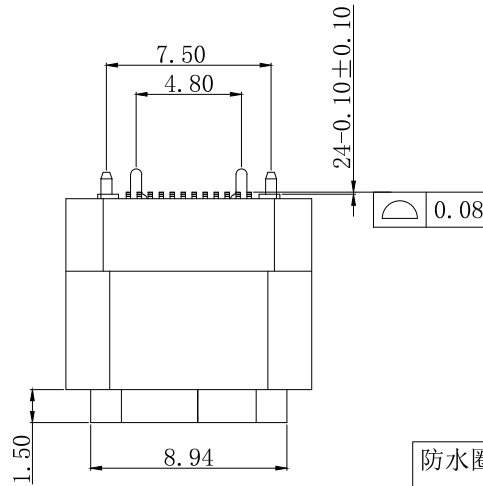
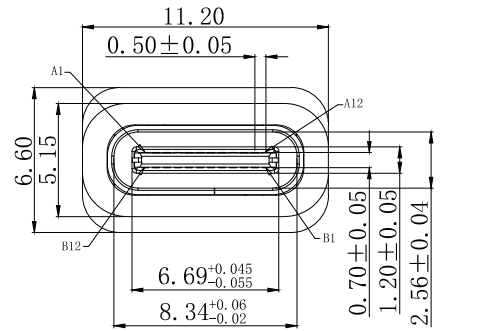
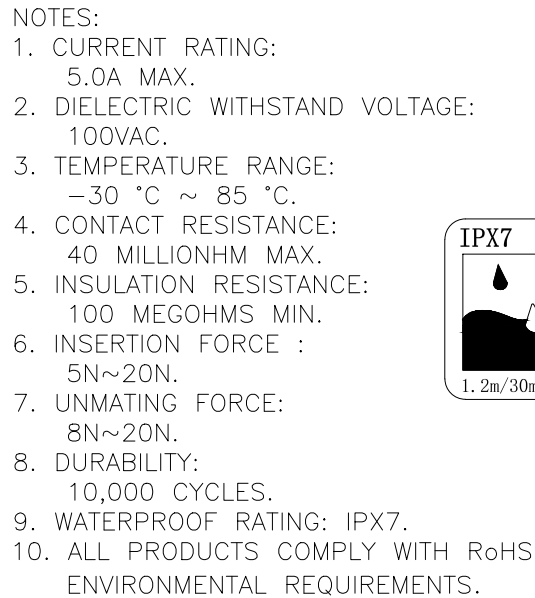




THICKNESS $1.0 \pm 0.10\text{MM}$; DEFAULT TOLERANCE: ± 0.05

黑色, ROHS.	
SUS304R-1/2H,T=0.30mm	Ni:50u"Min;
PA9T(G.F30%),BLACK.	/
SUS304 R-H,T=0.15mm	/
C7025.TM03. T=0.15mm	Ni:30u"Min; Au:CONTACT AREA:1u", Solder AREA: G/F.
C7025.TM03. T=0.15mm	
LCP(G.F30%) BLACK.	/
MATERIALS	FINISH

MEASURE POINT: QUADRANT POINT ☐ QP TANGENCY POINT ☐ TP INTERSECTION POINT ☐ IP	 深圳金盟实业有限公司 ShenzhenJinmengIndustrialCo., Ltd				
UNLESS OTHERWISE SPECIFIED, TOLERANCE: X. ±0.25 X.x ±0.20 X.xx ±0.15 X.xxx ±0.10 ANGLES ±2°	TITLE:USB C TYPE CONNECTOR TYPE C 24Pin 立贴 防水 H=10.50 四脚插板(点胶款)			DRAW NO:01.01.00053	
	THIRD ANGLE PROJECTION 			TEL:0755-89973631	
		UNIT: mm	SCALE: 1:1	SIZE: A4	SHEET: 1/2