



防水圈:

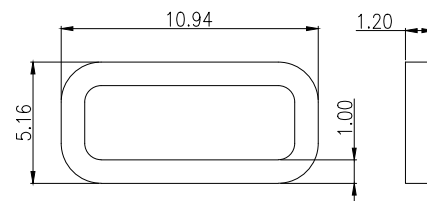







IPX6



1m/30min

NOTES:

1. CURRENT RATING:
3.0A MAX.
2. DIELECTRIC WITHSTAND VOLTAGE:
100VAC.
3. TEMPERATURE RANGE:
-30 °C ~ 85 °C.
4. CONTACT RESISTANCE:
40 MILLIONHM MAX.
5. INSULATION RESISTANCE:
100 MEGOHMS MIN.
6. INSERTION FORCE :
5N~20N.
7. UNMATING FORCE:
8N~20N.
8. DURABILITY:
10,000 CYCLES.
9. WATERPROOF RATING: IPX6.
10. ALL PRODUCTS COMPLY WITH ROHS
ENVIRONMENTAL PROTECTION REQUIREMENTS.

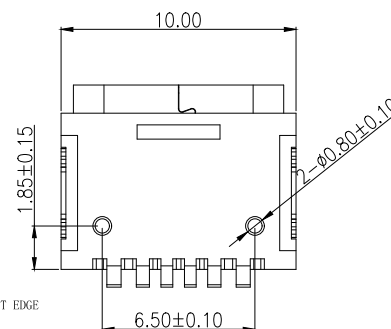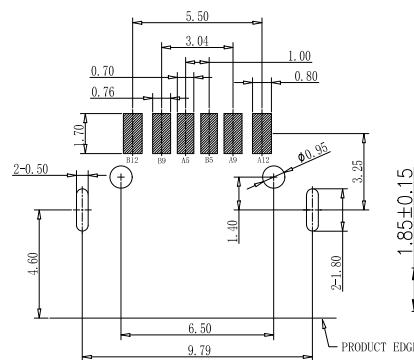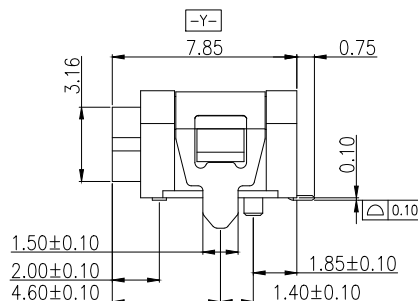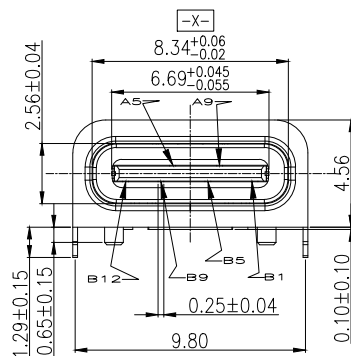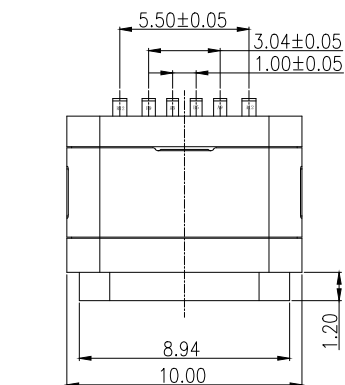


RECOMMEND P. C. B LAYOUT (COMPONENT SIDE)

TOLERANCE FOR PCB LAYOUT IS ±0.05

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
		B5	CC2
		B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

	SUS304R-1/4H.T=0.20mm	Ni:50u"Min;
	PA9T(G.F30%).BLACK.	
	SUS304R-1/2H.T=0.30mm	Ni:50u"Min;
	C2680R-H.T=0.20mm	Ni:30u"Min; Au:CONTACT AREA:1u", Solder AREA:G/F
	LCP(G.F30%) BLACK.	/
	MATERIALS	FINISH



MEASURE POINT:
QUADRANT POINT
TANGENCY POINT
INTERSECTION POINT

QP

TP

IP

UNLESS OTHERWISE
SPECIFIED, TOLERANCE:
X. ±0.25
X. x ±0.20
X. xx ±0.15
X. xxx ±0.10
ANGLES ±2°



深圳金盟实业有限公司


ShenzhenJinmengIndustrialCo., Ltd

TITLE:USB C TYPE CONNECTOR

TYPE C 6Pin SMT 防水(MD款)
4+2款 双插板脚

工程图

THIRD ANGLE PROJECTION



UNIT:

mm

DRAW NO:01.01.00010

TEL:0755-89973631

SCALE:

1:1

SIZE:

A4

SHEET:

1/2